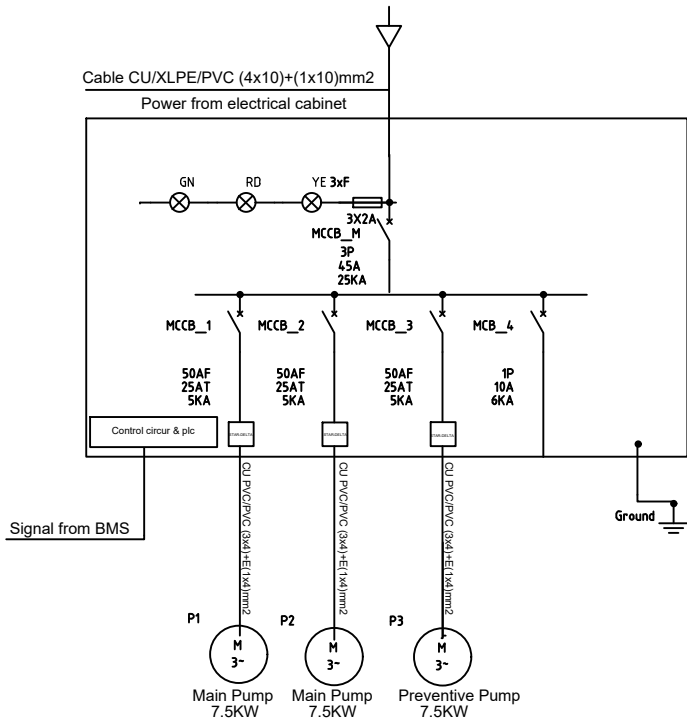
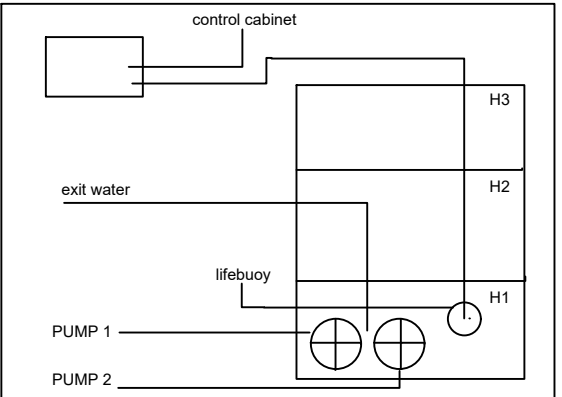


297

	1	2	3	4	5	6	7	8	9	10
A	Electrical cabinet diagram									
B										
C	Control principle									
D										
E	NOTES: - During panel fabrication, protective equipment must be selected and sized in accordance with the actual power ratings of the installed pumps. - The pump control system operates in two modes: - MANUAL MODE: Pumps are started/stopped manually via local Start/Stop pushbuttons. - AUTOMATIC MODE: Pumps are controlled automatically based on the pool water level (H) as follows: - When water level $H \leq H1$: All pumps stop running. - When water level $H \geq H2$: One pump runs. - When water level $H \geq H3$: Both Pump 1 and Pump 2 run simultaneously. - The control schematic may be modified to accommodate different measuring instruments and intermediate relays. - The level setpoints (H1, H2, and H3) must be configured in accordance with the drainage requirements of the pool. - For the detailed working principle of the pump system, please refer to the Water Supply and Drainage design documents. - Ratings of variable frequency drives (VFD/inverters), Direct-On-Line (DOL) starters, and Star-Delta starters must be adjusted based on the actual power ratings of the installed pumps.									
			Chữ Ký	Tên Khách Hàng				Ngày Vẽ	11-07-2026	
	Người Vẽ	Huỳnh Hùng Anh		Công Ty UTC1				Ngày Phê Duyệt	10/8/2026	
	Người Kiểm Tra	Nguyễn Văn B		Tên Bản Vẽ				Tỷ Lệ	3:9	
	Người Phê Duyệt	Phạm Văn C						Trang	3	